

Battery Carbon Monoxide Alarm User and Installer Guide

Model: 2030-DCR

Quick Start Instructions included
at the back of this User Guide



EN 50291-1:2018

P/N: 2030-7202-01

Product Features



Model: 2030-DCR

1. Carbon Monoxide Alarm: What To Do When the Alarm Sounds

The carbon monoxide (CO) alarm pattern is four quick beeps repeating every 5 seconds. The red LED flashes in sync with the beep pattern.

WARNING: CARBON MONOXIDE ALARM ACTIVATION INDICATES THE PRESENCE OF CARBON MONOXIDE (CO) AT HIGH CONCENTRATIONS WHICH CAN KILL YOU.

Based on recommendations from EN 50292, follow these steps if alarm sounds:

1. Keep calm and open all doors and windows. Turn off all fuel-burning appliances if possible. Note: It is possible that outdoor conditions could influence domestic CO alarm; if traffic pollution is bad weather, for example, in these circumstances, the level of indoor CO might actually increase when doors and windows are opened.
2. If the alarm continues to sound, even after being reset (where appropriate), then evacuate the premises, alerting other occupants to the risk. Leave doors and windows open. Do not re-enter the premises.
3. Get medical help for anyone suffering the effects of CO poisoning, and advise that CO inhalation is suspected.
4. Call Gas Emergency Services: 0800 111 999, or your local Gas Safe Registered Engineer.

PHONE NUMBER:

Never restart the source of the CO problem until it has been corrected.
Never ignore the sound of the alarm!

NOTE: See Section RECOGNIZING NUISANCE ALARMS, for nuisance alarm situations.

6. Recommended Locations for CO Alarms

Note: CO alarms should be installed following the guidance of relevant local standards, such as EN50292.

- Whether the alarm is wall-mounted or ceiling mounted, place the alarm a horizontal distance of between 1 metre and 3 metres from a fuel burning appliance.
- When mounting the alarm on the wall, use an inside wall with the top edge of the alarm at a minimum of 150 mm below the ceiling. The bottom of the alarm should also be at a level greater than the height of any door or window.
- Locate within hearing distance of bedrooms* and place at sleeping height if a heating appliance is in the bedroom.
- CO alarms in rooms with sloped ceilings should be located on the high side of the room.
- Ceiling mounted alarms should be at least 300 mm from any wall.
- If there is a partition in the room, locate the alarm on the same side of the partition as the potential source.

* A CO alarm should be installed in all rooms containing a fuel burning appliance. Additional CO alarms should be installed in rooms where most awake time is spent, in every sleeping area, and on every level of the home.

Thank You for Purchasing this Kidde Alarm

Powered by two AA batteries, this model includes a Reset function to temporarily silence nuisance alarms. Teach children how to respond to the alarm and that they should never play with the unit. This alarm is designed to detect carbon monoxide from any source of combustion in a residential environment. It is not designed for use in carevans, motor homes or boats.

NOTE: Please thoroughly read this user guide and save the document for future reference and to pass on to any subsequent owner.

IMPORTANT: Additional markings can be found on the back of the unit.

The manufacturer recommends replacing this alarm ten years from the date code on the side of alarm.

ENVIRONMENTAL PROTECTION
Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with Local Authority or Supplier for recycling advice.



Product Support: 0800 917 0722
Please write down the below information and have this at hand when you call

Date Code on unit: _____
Date of Purchase: _____
Where Purchased: _____
Date to Replace: _____

5. Limitations of CO Alarms

WARNING: PLEASE READ CAREFULLY AND THOROUGHLY

This alarm is not intended to alert hearing impaired individuals.

LIMITATIONS OF CO ALARMS

• **IMPORTANT:** This alarm is designed to detect carbon monoxide gas from ANY source of combustion. It is NOT designed to detect any other gas. This alarm has not been tested specifically for use in carevans or boats. Only CO alarms certified to EN50291-2 are fully approved for this purpose.

• **CAUTION:** This alarm will only indicate the presence of carbon monoxide gas at the sensor. Carbon monoxide gas may be present in other areas. Never restart the source of a CO problem until it has been fixed. NEVER IGNORE THE ALARM!

• **WARNING:** THIS PRODUCT IS INTENDED FOR USE IN ORDINARY INDOOR LOCATIONS OF FAMILY LIVING UNITS. IT IS NOT DESIGNED TO MEASURE COMPLIANCE WITH COMMERCIAL AND INDUSTRIAL STANDARDS. THIS ALARM IS NOT SUITABLE FOR INSTALLATION IN HAZARDOUS LOCATIONS.

IMPORTANT: THIS CARBON MONOXIDE ALARM IS DESIGNED TO DETECT CARBON MONOXIDE FROM ANY SOURCE OF COMBUSTION INCLUDING IMPROPER OR MALFUNCTIONING APPLIANCES. THE INSTALLATION OF THIS DEVICE SHOULD NOT BE USED AS A SUBSTITUTE FOR PROPER INSTALLATION, USE AND MAINTENANCE OF FUEL BURNING APPLIANCES INCLUDING APPROPRIATE VENTILATION AND EXHAUST SYSTEMS.

• This alarm does not prevent CO from occurring, nor can it solve any existing CO problem.

2. Other Alarm Visual and Audible Indicators

Operational Mode	Visual Indicators	Audible Indicators	Action/Note
Normal (standby)	Green LED (flashes approx every 30 sec)		
Test (button press when no alarm condition is present)	Green and yellow LEDs flash twice. Red LED stays in sync with beep pattern.	4 x loud beeps, a pause, 4 loud beeps, 4 single beeps	Perform test button press once a week to verify proper alarm operation.
CO Alarm Memory (unit has experienced a CO alarm event of 100 ppm or more CO within the last 14 days)	Red LED (flashes 1 time every 30 sec)	None	Push button to clear Alarm Memory.
CO alarm reset	Red LED (continues to signal the alarm pattern)	After 14 days of only CO alarm pattern stops.	Unit is confirming if CO is present or if it experienced a nuisance situation. The alarm status changes. Allow 10 seconds and call 0800 111 999.

7. Locations to Avoid

- In the garage. Products of combustion are present when you start your motor vehicle.
- Do not install alarms adjacent to, or directly above, heaters or air conditioning vents.
- In very humid areas (above 90% RH, non-condensing), such as bathrooms and shower rooms. Do not install directly above a sink, or near dishwashers or washing machines. Moisture or steam can cause nuisance alarms.
- Do not install within 3 m of heating or cooking appliances, measured horizontally.
- In an area where the temperature may fall below -10°C or rise above 40°C such as garages and unfinished attics.
- Do not install alarms in dusty areas. Dust particles may cause nuisance alarm or failure to alarm.
- In insect-infested areas.
- Within 300 mm of a light fitting, as electronic "noise" generated by the electronics may cause nuisance alarms.
- Do not install in an enclosed space (cupboard) or where the ventilation openings in the unit could be impeded by items such as houseplants, table cloths, furniture, curtains, etc.
- Do not install next to a door, window, extractor fan, bus, chimney, or any other area where high air flow may occur or the unit may be directly exposed to weather.
- Do not install in locations that are difficult or dangerous to reach for testing or maintenance.

WARNING: TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS PRODUCT TO RAIN OR MOISTURE.

Contents

1. Carbon Monoxide Alarm: What To Do When the Alarm Sounds	4
2. Other Alarm Visual and Audible Indicators	5
3. Troubleshooting Guide	6
4. Introduction, Product Features and Specifications	7
5. Limitations of CO Alarms	9
6. Recommended Locations for CO Alarms	11
7. Locations to Avoid	12
8. Installation	13
9. Operation and Testing	14
10. Recognizing Nuisance Alarms	16
11. Battery	17
12. General Carbon Monoxide (CO) Information	19
13. Clearing Your Alarm	20
14. Service and Warranty	23
Quick Start Instructions	24

WARNING: THIS DEVICE IS DESIGNED TO PROTECT INDIVIDUALS FROM ACUTE EFFECTS OF CARBON MONOXIDE EXPOSURE. IT MAY NOT FULLY SAFEGUARD INDIVIDUALS WITH SPECIFIC MEDICAL CONDITIONS. IF IN DOUBT, CONSULT A MEDICAL PRACTITIONER. INDIVIDUALS WITH MEDICAL PROBLEMS MAY CONSIDER USING WARNING DEVICES WHICH PROVIDE AUDIBLE AND VISUAL SIGNALS FOR CARBON MONOXIDE CONCENTRATIONS UNDER 30 PPM.

- This alarm has not been investigated for carbon monoxide detection below 50 PPM.
- This alarm requires a continuous supply of electrical power - it will not work without power.

WARNING: THIS CARBON MONOXIDE ALARM IS NOT A SUBSTITUTE FOR INSTALLING AND MAINTAINING AN APPROPRIATE NUMBER OF SMOKE ALARMS IN YOUR HOME. THIS ALARM WILL NOT SENSE SMOKE, FIRE, OR ANY POISONOUS GAS OTHER THAN CARBON MONOXIDE. FOR THIS REASON YOU MUST INSTALL SMOKE ALARMS TO PROVIDE EARLY WARNING OF FIRE AND TO PROTECT YOU AND YOUR FAMILY FROM FIRE AND ITS RELATED HAZARDS.

9 10

3. Troubleshooting Guide

Trouble Condition	Visual Indicators	Audible Indicators	Action
Low Battery	Red LED (flashes every 30 sec)	Chirp every 30 sec	• Push test button once to silence for 24 hrs. Note: 30 days after Low Battery begins, the notification cannot be silenced. • Replace batteries as soon as possible.
Memory Fault	Red LED (flashes 2 times every 30 sec)	Chirp every 30 sec	• Push test button once to attempt to reset the unit.
CO Fault	Red LED (flashes 1 time every 30 sec)	Chirp every 30 sec	• See Clearing Your Alarm section.
End of Unit Life	Red LED (flashes 2 times every 30 sec)	Two chirps every 30 sec	• The notification will continue to at least 30 days when End of Unit Life begins. • Push button once to silence for 24 hrs. Note: 7 days after End of Unit Life begins, the notification cannot be silenced. • Replace, dispose unit, and replace as soon as possible.
MCU Failure	None	Constant tone	• Replace alarm.
Stuck Button	Red LED (flashes every 5 sec)	Chirp every 5 sec	• Push button to disengage it from being stuck. If button cannot be unstick, remove, dispose unit, and replace as soon as possible.

NOTE: If at any time your alarm fails to operate correctly (emit or low sound, for example), or if you require further information, please contact customer support at 0800 917 0722.

8. Installation / Activation

CAUTION: THIS UNIT IS BEZEL (THE COVER) IS NOT REMOVABLE!

NOTE: YOUR CO ALARM MUST BE INSTALLED BY A COMPETENT PERSON, AND IS TO BE

INSTALLED ACCORDING TO THESE INSTRUCTIONS.

After selecting the proper alarm location as described in the "Recommended Locations for CO Alarms" section, you may choose either a wall mounting or free-standing installation.

Wall-mounting (recommended by the manufacturer, if possible)

1. Drill two holes in a wall (11 mm apart) (you may wish to use the back-plate for guidance).
2. Insert the two wall plugs that are supplied into the holes.
3. Insert the two screws (as supplied) into the holes ensuring enough of the screw sticks out of the wall approx. 3mm.
4. Hook the alarm back-plate over the screws, and then tighten the screws to tighten the back-plate.
5. Slide the alarm onto the back-plate.

Free-standing

Note: When sliding the back-plate on the alarm, apply pressure to the back-plate to ensure that it sticks.

ALWAYS BE CAREFUL TO LOCATE A FREE-STANDING ALARM WHERE IT IS UNLIKELY TO BE KNOCKED TO THE FLOOR, AND IN ACCORDANCE WITH THE RECOMMENDED LOCATIONS SECTION.

Ensure free-standing alarm is placed in the upright position, and not lying flat on a surface.

Activation

1. Remove the batteries from the pack and insert them into the battery compartment. Make sure that you fit the batteries in accordance with the polarity markings (+/-) within the battery compartment. If correctly installed, the alarm will blink red/green/yellow LED once.
2. Slide the alarm onto the back-plate.

The alarm is now activated. After installation / activation, test your alarm as described in Operation and Testing section.

WARNING: FAILURE TO PROPERLY INSTALL AND ACTIVATE THIS ALARM WILL PREVENT PROPER OPERATION OF THIS ALARM AND WILL PREVENT ITS RESPONSE TO HAZARDS.

Testing

Test your alarm weekly, or after returning from a vacation or absence, by pressing and releasing the button quickly. A quick beep will confirm the button has been pushed followed by the test sequence. See Other Alarm Visual and Audible Indicators table. The alarm will sound if the electronic circuitry, horn, and batteries are working. If the alarm does not sound, or gives erratic or low volume sound, the unit must be replaced.

WARNING: DUE TO THE LOUDNESS OF THE ALARM, ALWAYS STAND ABOUT 1 METRE AWAY FROM THE UNIT OR USE EAR PROTECTION WHEN TESTING.

13. Cleaning Your Alarm

Your Alarm Should be Cleaned at Least Once a Year

You can clean the interior of your alarm by using compressed air or a vacuum cleaner hose and blowing or vacuuming through the openings around the perimeter of the alarm. The outside of the alarm can be wiped with a damp cloth. Use only water to dampen the cloth. Use of detergents or cleaners could damage the alarm. If the alarm is in fault mode, the alarm may be in need of cleaning. After cleaning, press the test button. If the fault does not clear, the alarm needs to be replaced.

- Never use detergent or other solvents to clean the unit.
- Avoid spraying air freshener, hair spray, or other aerosols near the alarm.
- Do not paint the unit. Paint will seal the vents and interfere with the sensor's ability to detect CO.
- Keep away from nappy disposals.
- Never attempt to disassemble the unit to clean inside. Adversing the alarm in any way may lead to a risk of electric shock or prevent it from functioning correctly. This action will void your warranty.
- The following substances can affect the CO sensor and may cause false readings and damage to the sensor: Methane, propane, isobutane, iso-propanol, ethyl acetate, hydrogen sulfide, sulfur dioxide, alcohol based products, paints, thinner, solvents, adhesives, hair spray, aftershave, perfume, and some cleaning agents.

NOTE: There could be other compounds occurring within a particular household which could cause similar effects.

- Move the Alarm and place in another location prior to performing any of the following:

- Staining or stripping wood floors or furniture
- Painting
- Wall papering
- Using adhesives

Storing the unit in a plastic bag during any of the above projects will protect the sensors from damage. When household cleaning supplies or similar containers are used, the area must be well ventilated.

WARNING: REINSTALL THE ALARM AS SOON AS POSSIBLE TO ENSURE CONTINUOUS PROTECTION.

10. Recognizing Nuisance Alarms

Carbon Monoxide (CO) Nuisance

RESET: Pushing the test / reset button during CO alarm allows the unit to reset calculations and double check for the presence of CO. If the unit re-alarms, it is sensing high levels of CO which can quickly become a dangerous situation. Moves to fresh air and call 0800 111 999.

WARNING: IT IS IMPOSSIBLE TO DETERMINE THE SOURCE OF A CO ALARM USING SIGHT OR SMELL. ALWAYS CONSIDER A CO ALARM EVENT AS DANGEROUS.

14. Service and Warranty

Three-Year Limited Warranty

KIDDE SAFETY EUROPE LTD warrants to the original purchaser that the enclosed alarm (batteries excluded) will be free from defects in material and workmanship or design under normal use and service for a period of three years from the date of purchase. The obligation of KIDDE SAFETY EUROPE LTD under this warranty is limited to repairing or replacing the alarm or any part which we find to be defective in material, workmanship or design (part replacement only, no installation, free of charge to the customer, upon sending the alarm with proof of date of purchase, postage and return postage prepaid, to distributor: Warranty Service Department, Kidde Safety Europe Ltd, Ash House, Littleton Road, Ashford, TN15 1TZ, UK. Before shipping, please remove the batteries from the alarm.

This warranty shall not apply to the alarm if it has been damaged, modified, abused or altered after the date of purchase or if it fails to operate due to improper maintenance or inadequate A.C. or D.C. electrical power.

THE LIABILITY OF KIDDE SAFETY EUROPE LTD OR ANY OF ITS PARENT OR SUBSIDIARY CORPORATIONS ARISING FROM THE SALE OF THIS ALARM OR UNDER THE TERMS OF THIS LIMITED WARRANTY SHALL NOT IN ANY CASE EXCEED THE COST OF REPLACEMENT OF THE ALARM AND, IN NO CASE, SHALL KIDDE SAFETY EUROPE LTD OR ANY OF ITS PARENT OR SUBSIDIARY CORPORATIONS BE LIABLE FOR CONSEQUENTIAL LOSS OR DAMAGES RESULTING FROM THE FAILURE OF THE ALARM OR FOR BREACH OF THIS OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED, EVEN IF THE LOSS OR DAMAGE IS CAUSED BY THE COMPANY'S NEGLIGENCE OR FAULT.

This warranty does not affect your statutory rights.

11. Battery

This alarm is powered by two AA batteries. Under normal operating conditions, the batteries will last a minimum of one year. NOTE: Constant exposures to extreme temperatures and humidities may affect battery life.


WARNING: DO NOT ATTEMPT TO OPEN THE ALARM FOR ANY REASON! DO NOT TRY TO REPAIR THE ALARM YOURSELF.

Low Battery

This alarm is equipped with a low battery monitor circuit. If the battery capacity is nearing the point where it can no longer provide adequate power for all alarm functions, the low battery condition will occur. See Troubleshooting Guide. The batteries must be replaced within 30 days of the first occurrence of the "Low Battery Warning" to provide continuous alarm protection.

Quick Start Instructions

Model: 2030-OCR

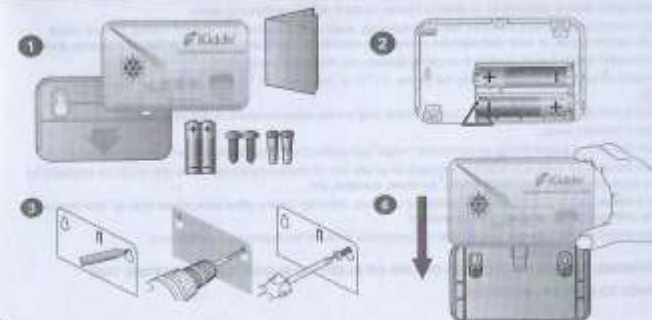

22

Replace battery



Slide alarm from back plate. Insert 2 x replacement 'AA' batteries (noting polarity - see sketch). Replace back-plate and test the alarm.

Recommended Batteries:
Duracell MN1500, MX1500
Gold Peak 15A
Golden Power BLR6A
Energizer E91


NOTE: Do not use Lithium batteries in this unit.

These batteries can be purchased from your local retailer.

WARNING! Alarm will not attach to back-plate unless batteries are installed. Depleted or removed batteries will render this alarm inoperative.

Chirping:

When End of Unit Life or Low Battery chirping begins, you can temporarily silence these chirps by pressing the test button. See Troubleshooting Guide.

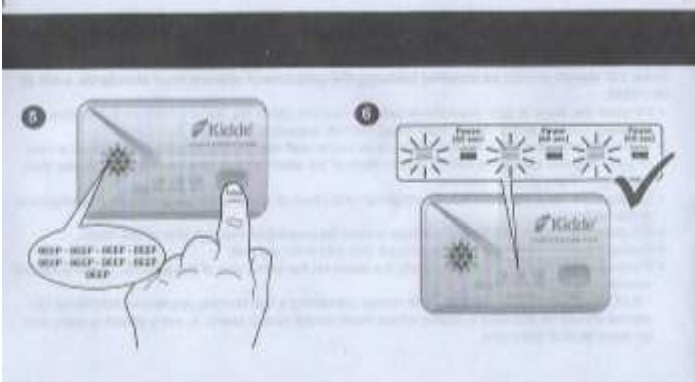

12. General Carbon Monoxide (CO) Information

What is Carbon Monoxide?

Carbon monoxide (CO) is a highly poisonous gas with no taste, colour or smell.

- Potential Sources of CO
- Wood-burning stoves
 - Gas boilers and fires
 - Gas hobs
 - Oil and coal burning appliances
 - Portable gas heaters
 - Blocked flues and chimneys
 - Fumes from integral garages
 - Barbecues
 - High concentrations of tobacco smoke

This CO alarm is not a substitute for proper installation, use and maintenance of fuel burning appliances including appropriate ventilation and exhaust systems. Carbon monoxide can be produced from poorly burning appliances or from blocked flues and chimneys.

If your alarm has sounded and you have ventilated the room, the CO may have dispersed before help arrives. It is crucial that the source of CO is determined and appropriate maintenance carried out.

Carbon monoxide is a cumulative poison. Long term exposure to low levels may cause symptoms.

This alarm is time-weighted - the higher the level of CO, the sooner it will alarm.

NOTE: The apparatus may respond to brief exhaust gas emissions, for example during the initial start-up of an appliance. Also, hydrogen acts as an inertant and can arise from some battery charging activities and the curing of concrete or cement under certain circumstances. Volatile Organic Compounds (VOCs, e.g. alcohol, which may eventually activate the alarm, can be generated from use of damp-proofing materials or other sealings containing alkylalkoxysilanes.

The table below shows the effects of different levels of CO poisoning on the body:

Part-per-million (PPM)	Effects on Adults
100	Slight headache, nausea, fatigue (flu-like symptoms)
200	Dizziness and headache within 2 - 3 hours
400	Nausea, frontal headache, drowsiness, confusion and rapid heart rate. Risk to life after over 3 hours of exposure
800	Severe headaches, convulsions, vital organ failure. Death possible within 2 - 3 hours

WARNING: The device cannot warn against the chronic effects of exposure to carbon monoxide or protect individuals who are at specific risk.

NOTE: If you recognise any of the above symptoms consult your Doctor immediately.

NOTE: Young children, elderly and pets are more susceptible to the dangers of CO.

NOTE: Your Kidde alarm is designed to detect CO gas. It is not designed to detect other gas such as natural gas.

NOTE: This product is intended for use in ordinary family homes. It is not designed to measure compliance with occupational safety and the HSE.

NOTE: Individuals with certain specific medical conditions may need an alarm that operates below 30ppm. If this applies consult your Doctor.

Kidde HelpLine (UK) 0800 917 0722 / (Ireland) 1800 018 601
Emergency Numbers:
Gas Emergency Services: 0800 111 999
HETAS (Burst Fuel Emergency) 0845 634 6628
Onus: 01454 655 5390



© 2021 Carrier Air Conditioning
Manufactured By:
Wärme Klima Technik Equipment Inc.
1016 Corporate Park Drive, Milburn, NJ 07033, USA
Telephone: 0800 917 0722
www.kiddealarm.europa.eu
Made in China
By Authorized Representative
Carrier Fire & Security B.V.
Kalkhofstraat 7
8903 CH Wierum, NL

IMP
and
not
of
in
nur