

NEW On Board Water Pump

Delivers smooth consistent flow and runs dry without damage



8 Litre Model. Vertically fitted

PERFORMANCE

- Quiet Operation
- Automatic Operation - Plug 'n' Play
- Easy Installation - Quick Connect Plumbing



Lightweight
20% lighter*



12 Litre Model. Horizontally fitted

POWER

- High flow rates at a variety of outlets
 - Smooth Constant Flow
- Self Priming Up To 3m (10ft)

PLUS


PROTECTION

- Fully Sealed Protective Motor Housing
 - Completely Integrated Electronics
 - Runs Dry Without Damage
- Includes strainer to protect pump from debris


*Compared to a Whale® Smartflo based on tests carried out in the Whale® Laboratory, information is correct on Sept 2012.




| Product Code | FP0814B | FW1214B | FW1215B |
|---|--|--|---------------|
| Mounting Orientation | Vertical Mount | Horizontal Mount | |
| Open Flow Rate (per min) | 8 ltr (2.0 US GPM) | 12 ltrs (3.0 US GPM) | |
| Voltage | 12 V d.c. | | |
| Max. System Pressure | 2 bar (30psi) | | 3 bar (45psi) |
| Hose Connections | Whale® Quick Connect 12mm Female Connections | Whale® Quick Connect 15mm Female Connections | |
| NOTE: REDUCERS/ADAPTORS AVAILABLE FOR DIFFERENT TYPES OF PIPEWORK/SIZES | | | |
| Recommended Fuse Size | 5 Amp Automotive | 7.5 Amp Automotive | |
| Current Draw | 4 Amps | 6 Amps | |
| Weight | 1.5 KGS (3.3LBS) | | |



FP0814B



FW1214B/FW1215B

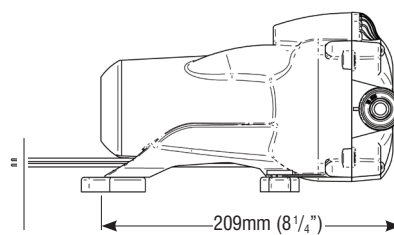

©Copyright Whale 2013 - All rights reserved.
 Whale® and Watermaster® are registered trademark of Munster Simms Engineering Limited, Bangor, Northern Ireland, trading as Whale. Whale's policy is one of continuous improvement and we reserve the right to change specifications without prior notice.
 Illustrations are for guidance purposes only.