



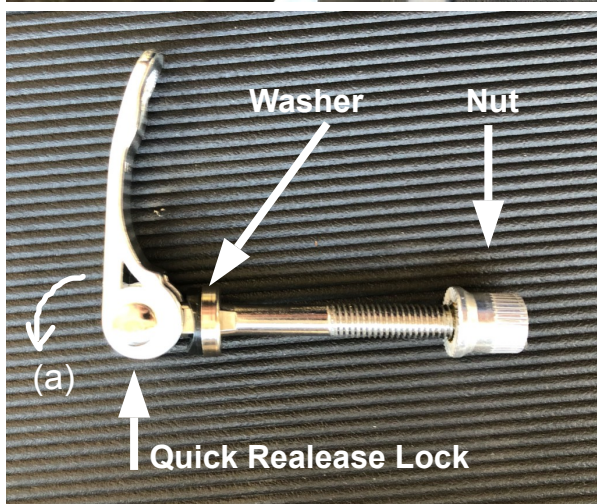

# Double Step & Handle Fixing Instructions

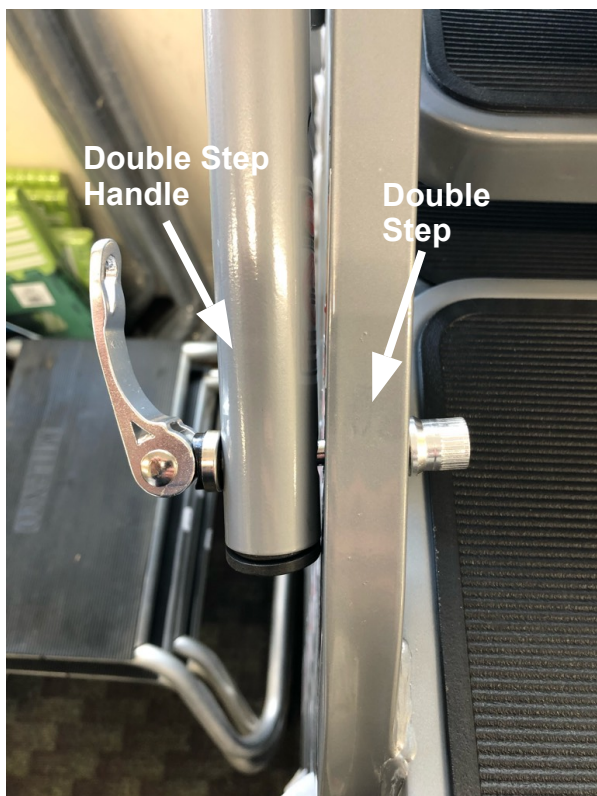

1. Line the Handle Holes up with the Double Step Holes.
2. Take the Nut off the bolt making sure the Washer is placed at the Quick Release Lock.
3. Push the bolt through the Handle Hole then through the Double Step Hole.
4. Make sure the Quick Release lock is in the horizontal position. (a)
5. Locate the Nut with the moulded washer facing towards the Double step & tighten with your fingers until tight.
6. Push the Quick Release Lock vertically towards the handle as shown making sure the Handle is securely fixed.
7. If there's any movement once all bolts have been secured, release the Quick Release Lock and turn clock wise one full turn then Re-Lock.