

ADAPTOR DIA 21 MM - MODEL : A21-90

OPERATING INSTRUCTIONS TO BE KEPT BY THE USER READ THOROUGHLY BEFORE USE

INSTRUCTION FOR USE

These Installation and Operating Instructions are to be kept for future reference.





Please read the instructions carefully before connecting the adaptor to the cylinder valve or operating any appliance.

This adaptor is only designed for dia 21 mm cylinder valves. DO NOT force the adaptor on to the cylinder valve. If problems are encountered, consult your dealer.

TECHNICAL INFORMATION

Type of Gas	:	Butane / Propane / LPG
Maximum Inlet Pressure	:	16 bar
Nominal Outlet Pressure	:	un-reduced
Inlet Connection	:	21 mm

OPERATING INSTRUCTIONS

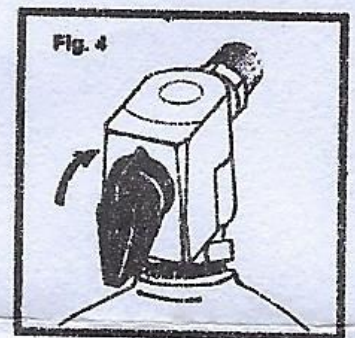

a) Before engaging the adaptor on the cylinder valve, make sure outlet connection is connected to appliance with a suitable hose assembly or pigtail.

b) Refer to Fig. 1 to understand the ON, OFF and detach position of the Knob.

c) Turn the Knob anti-clockwise till the detach position (refer Fig. 2) and press the adaptor downwards on the cylinder valve. Turn the knob clockwise till the OFF position (Refer Fig. 3). Now, the adaptor is engaged on the cylinder valve without gas flowing through outlet connector.

d) Now, the adaptor can be turned on by rotating the knob clockwise to ON position (Refer Fig. 4).

Note : Knob should always be in OFF position when not in use.

e) To disconnect the adaptor from the cylinder valve, turn the knob anti-clockwise till detach position and pull up the adaptor to dis-engage.